








MR-1

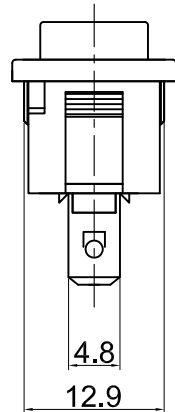


Rating: 10A 125V AC (UL CUL)
 6A 250V AC (UL CUL VDE CB)
 Contact Resistance: 50mΩ Max
 Insulation Resistance: DC 500V 100MΩ Min
 Dielectric Strength: AC1500V 1 minute
 Electrical life: 10,000 cycles
 Operating Temperature: 0°C ~85°C



CUT-OUT



	X	Y
0.75~1.25	19.2 ^{+0.1} _{-0.0}	12.9 ^{+0.15} _{-0.00}
1.25~2.00	19.4 ^{+0.1} _{-0.0}	12.9 ^{+0.15} _{-0.00}
2.00~3.00	19.8 ^{+0.1} _{-0.0}	12.9 ^{+0.15} _{-0.00}



MATERIAL:

Body:Nylon66,UL rated:94V-2 min
 Actuator:Nylon66,UL rated:94V-2 min
 Terminal:Brass,silver or tin plated

X	0	1	2	3	4	5	7	8	9	A	B	C	D	E	G
Marking	none	•	ON OFF	≡	⊖	⊙	ON/开 OFF/关	⚡	I/O	💡	⊖	⊖	⊖	开 关	⊖

公差 TOLERANCES				角度 ANGLE				单位 DIMENSION UNIT							
版本 VERSION		A1		比例尺 SCALE		NONE		日期 DATE		2020.07.17		品名 TITLE		图号 DRAWING NO	
A1		重新整理后发行		2020.07.17		N/A		核准				MR-1-119-C2N-BBAAE		MR-1-119-C2N-BBAAE_A1	
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	DRAWN BY									