





宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

### FH1-200C


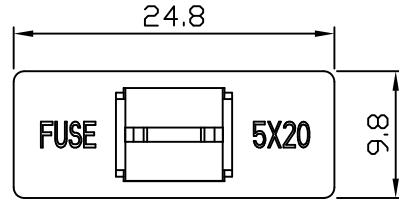


Fuse holder for overload protection  
Rating: 10A 250VAC (UL,CUL)


Fuse:  $\varnothing 5.0 \times 20 \text{mm}$

Operating Temperature:  $0^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Dielectric Strength: 1500VAC 1 minute

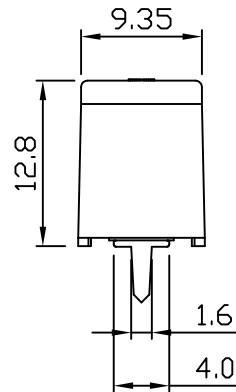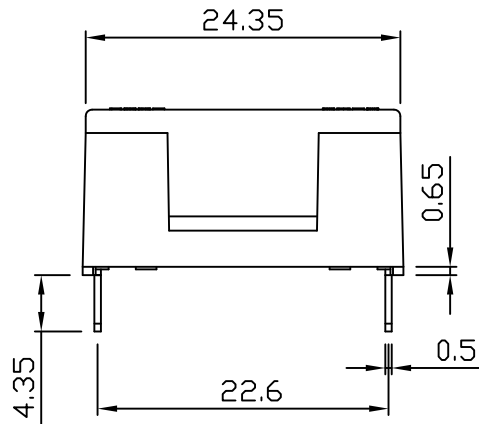

### P.C.B.LAYOUT

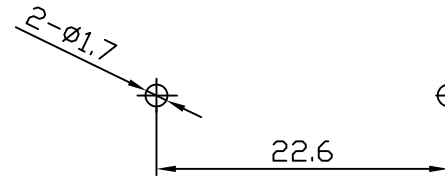

### MATERIAL:

Housing: PBT, UL rated 94V0 min

Bayonet: PBT, UL rated 94V0 min

Terminal: Phosphor bronze, silver or tin plated

				公差 TOLERANCES				角度 ANGLE $\pm 1^{\circ}$		单位 DIMENSION UNIT mm.		
A2	重新整理发行	2019.12.13	N/A	版本: A2	.X $\pm 0.3$	.XX $\pm 0.15$	比例尺 SCALE	1:1	日期 DATE	2019.12.13	品名 TITLE	图号 DRAWING NO
A1	重新整理发行	2014.07.26	N/A	核准			核对	Z. H. B.	绘图	王立权	FH1-200CK-B	FH1-200CK-B_A2
A0	New Issue	2009.02.26	N/A	核 准			核 对		绘 图			
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO	APPROVED BY			CHECKED BY		DRAWN BY			