

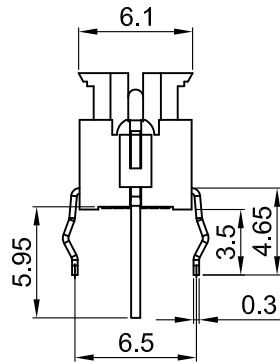
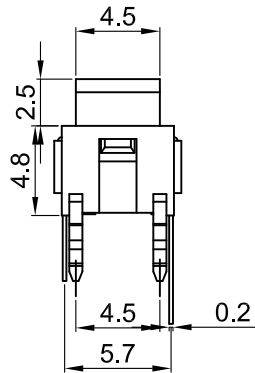





TS2




Specifications
 Circuit :SPST
 Current rating :50mA
 Voltage rating :12VDC
 Dielectric withstanding voltage:250VAC for 1 minute
 Contact resistance :100mΩ Max. (Initial)
 Insulation resistance :100MΩ Min.
 Operating force :180±50gf
 Total travel :0.25mm±0.1mm
 Operating life :100,000 cycles Min
 Solder specifications :260° C for 5 seconds
 Function :Momentary
 Operating temperature :+10° C ~ +60° C

P.C.B. LAYOUT

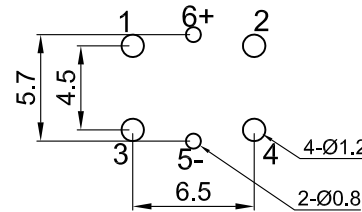

CIRCUIT



MATERIAL:

Base Frame: Nylon46, UL rated:94 V-2 Min. ;
 Actuator: PA66, UL rated:94 V-2 Min. ;
 Terminal: Brass, Silver or Tin plated .

BG	纯绿色	3.2	3.7	4.2	20	120	515	525	
W	白色	2.8	3.4	3.8	20	120	XY	XY	
O	橙色	1.8	2.2	2.4	20	120	620	634	
WR	白色	2.8	3.4	3.8	20	120	XY	XY	
	红色	1.8	2.2	2.4	20	120	620	630	
U	蓝色	2.8	3.2	3.4	20	120	460	470	
G	黄绿色	1.8	2.2	2.4	20	120	563	575	
Y	黄色	1.8	2.2	2.4	20	120	582	588	
R	红色	1.8	2.2	2.4	20	120	620	630	
灯发光颜色 X Emitted color X	最小	一般			最大	最大操作电流 (mA)	最大脉冲电流 (mA)	主波长 (nm)	峰值波长 (nm)
	顺向电压(V)								

				公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT	mm.
				版本 VERSION	A2	比例尺 SCALE	NONE	日期 DATE	2019.10.16	品名 TITLE	图号 DRAWING NO
				核准		核对 CHECKED BY	Z.H.B.	绘图 DRAWN BY	王立权	TS2-00-00R	TS2-00-00R_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY	Z.H.B.	DRAWN BY	王立权		