








宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

PB-04



Rating: 3A 125V AC ;  
 1.5A 250V AC ;  
 Contact Resistance: 50mΩ Max. ;  
 Insulation Resistance:DC 500V 100MΩ Min. ;  
 Dielectric Strength:AC 1000V 1 minute  
 Total Travel: 2.5±0.4mm  
 Operating Force:250±100gf  
 Operating Life:10,000 cycles  
 Operating Temperature:0°C~85°C  
 Function: OFF-(ON)

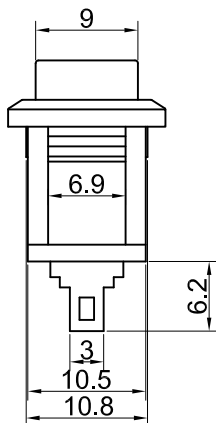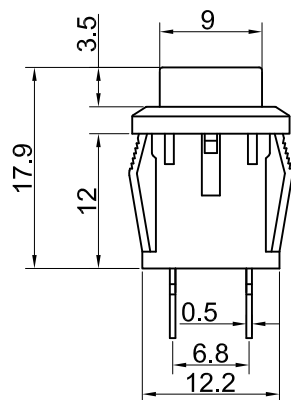

CUT-OUT



Panel Thickness: 3mm MAX.

**MATERIAL:**

Base:Nylon66 UL rated: 94V-2 Min. ;  
 Cap:ABS ;  
 Terminal: Brass,Silver or Tin plated .

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
CAP COLOR (X)		

				公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.	
A1	图纸重新整理发行	2020.04.12	N/A	版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.04.12	品名 TITLE	图号 DRAWING NO
A0	New Issue	2008.07.08	N/A	核准		核对	Z.H.B.	绘图	HXG	PB-04-B-B	PB-04-B-X_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A